


## OVERVIEW

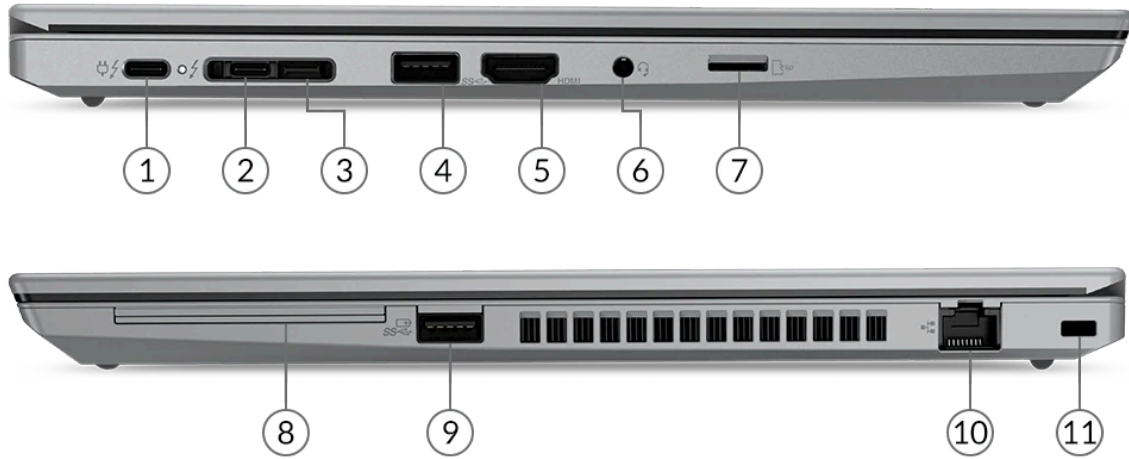

1. Thunderbolt 4	7. MicroSD card reader
2. Thunderbolt 4	8. Smart card reader *
3. Side docking connector	9. USB 3.2 Gen 1 (Always On)
4. USB 3.2 Gen 1	10. Ethernet (RJ-45) *
5. HDMI 2.0	11. Kensington Security Slot
6. Headphone / microphone combo jack (3.5mm)	

Notes:

- Ports with \* are only available on selected models
- Optional nano-SIM card slot on the rear side (not shown on the sample product above)
- The combination of 1, 2 and 3 is side docking connector

## PERFORMANCE

### Processor

#### Processor Family

11th Generation Intel® Core™ i5 / i7 Processor

#### Processor\*\*

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Memory Support	Processor Graphics
Core i5-1135G7	4	8	2.4GHz	4.2GHz	8MB	DDR4-3200	Intel Iris® Xe Graphics
Core i5-1145G7	4	8	2.6GHz	4.4GHz	8MB	DDR4-3200	Intel Iris Xe Graphics
Core i7-1165G7	4	8	2.8GHz	4.7GHz	12MB	DDR4-3200	Intel Iris Xe Graphics
Core i7-1185G7	4	8	3.0GHz	4.8GHz	12MB	DDR4-3200	Intel Iris Xe Graphics

### Operating System

#### Operating System\*\*

- Windows® 11 Pro 64
- Windows 11 Home 64
- Windows 11 DG Windows 10 Pro 64
- Windows 10 Pro 64
- Windows 10 Home 64
- Ubuntu Linux LTS
- Red Hat Enterprise Linux (certified only)
- No operating system

### Graphics

#### Graphics\*\*<sup>[1]</sup>

Graphics	Type	Memory	TGP	Key Features
Intel UHD Graphics	Integrated	Shared	Share CPU TDP	DirectX® 12
Intel Iris Xe Graphics	Integrated	Shared	Share CPU TDP	DirectX 12
NVIDIA® T500 Laptop GPU	Discrete	4GB GDDR6	18W	DirectX 12

#### Notes:

1. Intel Iris Xe Graphics requires dual-channel memory. On models with single-channel memory, Intel Iris Xe Graphics will function as Intel UHD graphics.

### Monitor Support

#### Monitor Support<sup>[1]</sup>

Supports up to 4 independent displays via native display and 3 external monitors; supports external monitors via HDMI® (up to 4K@60Hz) or Thunderbolt™ (up to 5K@60Hz)

#### Notes:

1. Refresh rates >60hz also supported, however max resolution will be limited.

### Chipset

#### Chipset

Intel SoC (System on Chip) platform

### Memory

#### Max Memory<sup>[1]</sup>

- Up to 40GB (8GB soldered + 32GB SO-DIMM) DDR4-3200
- Up to 48GB (16GB soldered + 32GB SO-DIMM) DDR4-3200

#### Memory Slots

One memory soldered to systemboard, one DDR4 SO-DIMM slot, dual-channel capable

#### Memory Type

DDR4-3200 non-ECC

Notes:

1. The max memory is based on the test results with current Lenovo® memory offerings. The system may support more memory as the technology develops.

## Storage

### Storage Support

One drive, up to 2TB M.2 2280 SSD

### Storage Slot<sup>[1]</sup>

One M.2 2280 PCIe® Gen 3x4 slot, supports M.2 2242/2280 SSD

### Storage Type<sup>\*\*[2]</sup>

Disk Type	Interface	RPM	Offering	Security
M.2 2280 SSD	PCIe NVMe®, PCIe x4	-	-	Opal2
M.2 2280 SSD	PCIe NVMe, PCIe 4.0 x4 Performance	-	-	Opal 2.0

### RAID

No support

Notes:

1. M.2 PCIe Gen 4 SSD in a M.2 PCIe Gen 3 slot runs at PCIe Gen 3 speeds
2. System comes with one M.2 SSD slot that supports PCIe 3.0

## Removable Storage

### Optical

None

### Card Reader

MicroSD card reader

## Multi-Media

### Audio Chip

High Definition (HD) Audio, Realtek® ALC3287 codec

### Speakers

Stereo speakers, 2W x2, Dolby® Audio™

### Microphone

- Dual array microphone, far-field
- No microphone

### Camera<sup>\*\*</sup>

- 720p, with privacy shutter, fixed focus
- IR & 720p hybrid, with privacy shutter, fixed focus
- No camera

## Battery

### Battery

Integrated Li-Polymer 57Wh battery, supports Rapid Charge (charge up to 80% in 1hr) with 65W AC adapter

### Max Battery Life<sup>[1]</sup>

MobileMark® 2018: 9.3 hr

JEITA 2.0: 15.8 hr

Notes:

1. All battery life claims are approximate maximum and based on results using the MobileMark 2014, MobileMark 2018, JEITA 2.0, continuous 1080p video playback (with 150nits brightness and default volume level) or Google Power Load Test (PLT) battery-life benchmark tests. Actual battery life will vary and depends on many factors such as product configuration and usage, software use, wireless functionality, power management settings, and screen brightness. The maximum capacity of the battery will decrease with time and use.

## Power Adapter

### Power Adapter\*\*<sup>[1]</sup>

- 45W USB-C (2-pin) AC adapter
- 45W USB-C (3-pin) AC adapter
- 65W USB-C slim (3-pin) AC adapter
- 65W USB-C slim (2-pin) AC adapter
- 65W USB-C (2-pin) AC adapter
- 65W USB-C (3-pin) AC adapter
- No power adapter

#### Notes:

1. No power adapter is for special bid only.

## DESIGN

### Display

#### Display\*\*<sup>[1]</sup>

Size	Resolution	Touch	Type	Brightness	Surface	Aspect Ratio	Contrast Ratio	Color Gamut	Viewing Angle	Key Features
15.6"	FHD (1920x1080)	None	IPS	300 nits	Anti-glare	16:9	800:1	45% NTSC	170°	-
15.6"	FHD (1920x1080)	Multi-touch	IPS	300 nits	Anti-glare	16:9	800:1	45% NTSC	170°	-
15.6"	UHD (3840x2160)	None	IPS	600 nits	Anti-glare	16:9	1400:1	100% Adobe® RGB	170°	Dolby Vision™, HDR 400

#### Color Calibration

- X-Rite® Pantone® factory color calibration (UHD display)
- No color calibration

#### Touchscreen

- On-cell touch, supports 10-point touch
- Non-touch

#### Notes:

1. California Electronic Waste Recycling Fee  
In California, per state law, Lenovo charges an electronic waste recycling fee on this covered device at the time of sale of the product. For more information, go to <https://www.calrecycle.ca.gov/Electronics/Consumer>

## Input Device

### Keyboard

6-row, spill-resistant, multimedia Fn keys with Unified Communications controls, numeric keypad

### Keyboard Backlight

- LED backlight
- No support

### UltraNav™

TrackPoint® pointing device and Mylar® surface multi-touch touchpad

## Mechanical

### Dimensions (WxDxH)

Models	Dimensions
All models	365.8 x 248 x 19.1 mm (14.40 x 9.76 x 0.75 inches)

### Weight<sup>[1]</sup>

Models	Weight
--------	--------

# ThinkPad P15s Gen 2

Aluminium models	1.783 kg (3.93 lbs)
PC + ABS models	1.75 kg (3.86 lbs)

## Case Color\*\*

- Black
- Storm grey

## Case Material\*\*

- Aluminium (top), PC + ABS / Talc15 + magnesium alloy (keyboard cover), PA / 50% GF (bottom)
- PC + ABS (top), PC + ABS / Talc15 + magnesium alloy (keyboard cover), PA / 50% GF (bottom)

## Notes:

1. The system weight varies depending on configurations.

## CONNECTIVITY

### Network

#### Onboard Ethernet\*\*

- Gigabit Ethernet, Intel Ethernet Connection I219-LM (vPro models), supports Wake-on-LAN
- Gigabit Ethernet, Intel Ethernet Connection I219-V (non-vPro models), supports Wake-on-LAN
- No Ethernet (Using optional ethernet adapter or dock)

#### WLAN + Bluetooth®\*\*<sup>[1]</sup>

- Intel Wi-Fi® 6 AX201, 802.11ax 2x2 Wi-Fi + Bluetooth 5.2
- Intel Wi-Fi 6E AX210, 802.11ax 2x2 Wi-Fi + Bluetooth 5.2
- No WLAN and Bluetooth

#### WWAN\*\*

- Wireless WAN upgradable to 4G (with antenna ready)
- Integrated Mobile Broadband 4G LTE, Quectel EM120R-GL, M.2 card, with embedded eSIM functionality
- Integrated Mobile Broadband 4G LTE, Quectel EM160R, MIMO 4x4, M.2 card, with embedded eSIM functionality
- No support

#### SIM Card

- eSIM
- No SIM card inbox

#### NFC

- Near Field Communication
- No support

## Notes:

1. Intel WiFi 6 full features might be limited by country level restrictions.  
6GHz Wi-Fi 6E operation is dependent on the support of the operating system, routers/APs/Gateways that support Wi-Fi 6E, and the regional regulatory certifications & spectrum allocation.  
Bluetooth 5.2 is supported with driver version 22.30 and later.

### Ports<sup>[1]</sup>

#### Standard Ports

- 1x USB 3.2 Gen 1
- 1x USB 3.2 Gen 1 (Always On)
- 2x Thunderbolt 4 / USB4™ 40Gbps / USB-C 3.2 Gen 2 (support data transfer, Power Delivery 3.0 and DisplayPort™ 1.4)
- 1x HDMI 2.0
- 1x microSD card reader
- 1x Headphone / microphone combo jack (3.5mm)
- 1x Side docking connector

#### Optional Ports\*\*\*

- 1x Ethernet (RJ-45)
- 1x Side docking connector (Ethernet model only)
- 1x Smart card reader
- 1x Nano-SIM card slot (WWAN model)

**Notes:**

1. The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.
  - USB 2.0: 480 Mbit/s;
  - USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;
  - USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;
  - USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;
  - Thunderbolt 3: 40 Gbit/s;
  - FireWire 400: 400 Mbit/s;
  - FireWire 800: 800 Mbit/s

## Monitor Cable

**Monitor Cable\*\*\***

- Lenovo HDMI to VGA Monitor Adapter
- Lenovo USB-C to DisplayPort Adapter
- Lenovo USB-C to VGA Adapter
- No monitor cable

## SECURITY & PRIVACY

### Security

**Security Chip\*\***

- Discrete TPM 2.0, TCG certified
- Firmware TPM 2.0 integrated in chipset
- Disabled (in some regions)

**Physical Locks**

Kensington® Security Slot

**Smart Card Reader**

- Smart card reader
- No smart card reader

**Fingerprint Reader**

- Touch style fingerprint reader on palm rest, match-on-chip
- No fingerprint reader

**BIOS Security**

- Supervisor password
- Power-on password
- NVMe password
- Self-healing BIOS

**Other Security**

- (Optional) Camera privacy shutter
- (Optional) IR camera for Windows Hello

## MANAGEABILITY

### System Management

**System Management**

- Intel vPro Technology, DASH
- None

## SERVICE

### Warranty

**Base Warranty\*\***

- 1-year depot service
- 1-year depot with 2-year system board service
- 1-year limited onsite service

- 1-year + 2-year depot service
- 1-year + 2-year limited onsite service
- 3-year (1-yr battery) depot service
- 3-year (1-yr battery) limited onsite service
- No base warranty

## ENVIRONMENTAL

### Operating Environment

#### Temperature<sup>[1]</sup>

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage and transportation in original shipping packaging: -20°C (-4°F) to 60°C (140°F)
- Storage without package: 5°C (41°F) to 43°C (109°F)

#### Humidity

- Operating: 8% to 95% at wet-bulb temperature 23°C (73°F)
- Storage and transportation: 5% to 95% at wet-bulb temperature 27°C (81°F)

#### Altitude

Maximum altitude (without pressurization): 3048 m (10,000 ft)

#### Notes:

1. When you charge the battery, its temperature must be no lower than 10°C (50°F).

## CERTIFICATIONS

### Green Certifications

#### Green Certifications

- EPEAT™ Gold
- ENERGY STAR® 8.0
- TCO Certified Notebooks 8
- RoHS compliant

### Other Certifications

#### Mil-Spec Test

MIL-STD-810H military test passed

### ISV Certifications

#### ISV Certifications

Please visit [www.thinkworkstations.com/isv-certifications/](http://www.thinkworkstations.com/isv-certifications/)

- Feature with \*\* means that only one offering listed under the feature is configured on selected models.
- Feature with \*\*\* means that one or more offerings listed under the feature could be configured on selected models.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION “AS IS,” WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without

notice.



